



In case of required assistance call us under: +49 (0)341-49 579 232.



Mitsubishi L200 Series 5 15>




1) Please check you have all the required parts before starting installation:

- 1 x Base plate and actuator kit
- 1 x Wiring loom
- 2 x Scotch Locks (you can solder the connections if preferred)
- 8-10 x Cable Ties
- Conduct Tubing


1) Open Tailgate, Undo 10 screws and remove metal panel to allow access into the inside of the tailgate



2) Remove the two screws that hold the tailgate handle into the tailgate

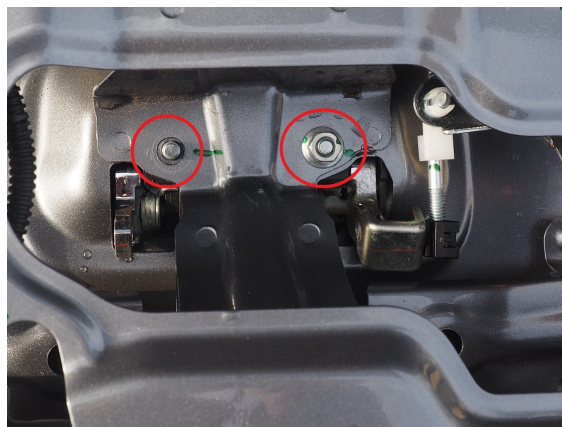


3) Install the base plate and actuator kit, hold in place by replacing the removed screws from no.2

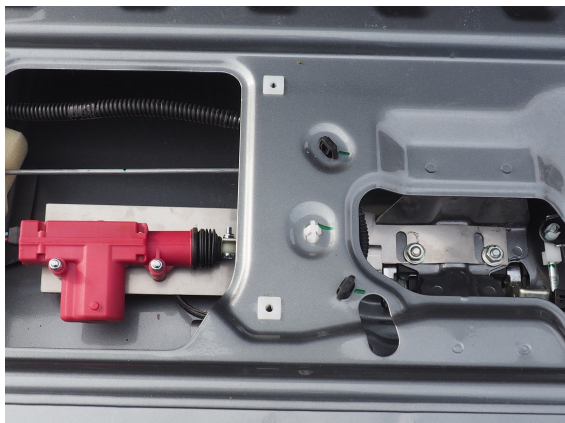

4) Connect wiring loom to the actuator:

Red to Red and Blue to Black

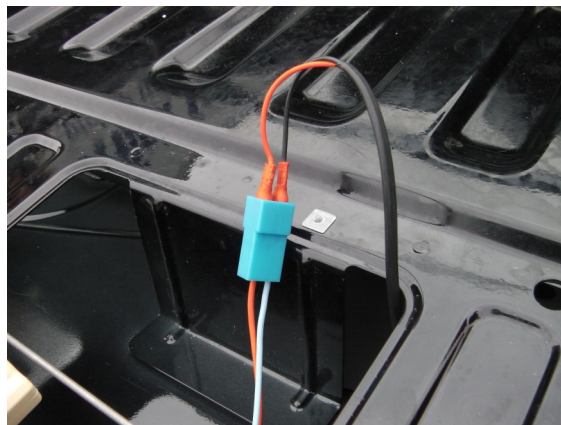

5) Feed Cable out of the tailgate on Passengers side, Use tubing provided to Protect Cable




6) Feed Cable along the passengers side of the vehicle and up into the passengers foot well


8) Remove passengers side door Sill Guard and Kick Plate to access vehicles wiring harness



8) Connect the Central locking kit into the vehicles Central locking Loom

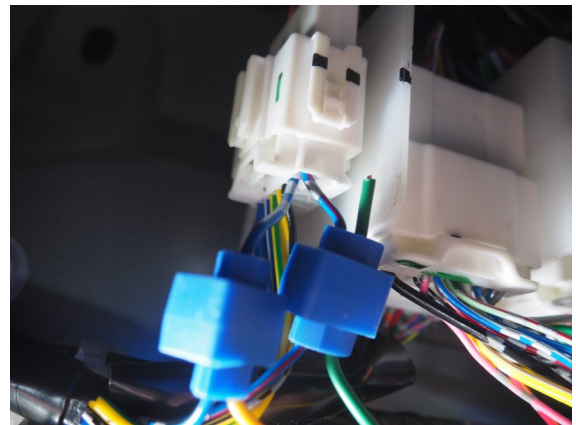

9) Connect cables using the scotch locks (or solder) please ensure the cables get a good connection

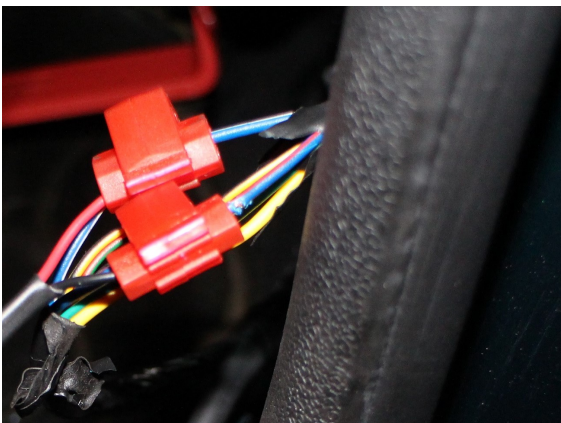

Eagle1 Lock wiring Loom	Vehicle Loom
Red	Blue with Black trace
Black	Blue with red trace

10) Test the kit works by clicking the central locking and see if the tailgate locks / unlocks.

11) If everything works replace tailgate cover

***Please note we always advise to cover any connections with electrical tape**